
## MRP SERIES

## MOBILE ROTATING PULVERIZERS

## **PULVERIZE WITH POWER & SPEED**

With the MRP, users can take on diverse primary and secondary demolition projects with one, versatile tool. A short center of gravity and 360-degree rotation gives the MRP optimal maneuverability, while the jaw's design facilitates improved penetration and rapid material downsizing. Dual rotation motors offer superior holding power and durability, and replaceable wear areas encourage longevity and minimized maintenance.

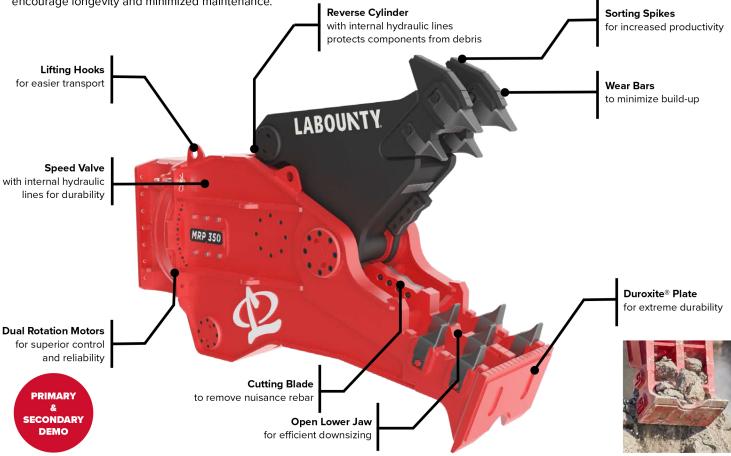

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft	m	lbs	m Tons	lbs	m Tons
MRP 90****	2,285	1,000	26	660	22	570	6.0	1.8	20,000	9	29,000	13
MRP 130****	3,100	1,400	28	710	26	650	6.8	2.1	29,000	13	40,000	18
MRP 150	4,963	2,300	29	730	28	710	7.9	2.4	40,000	18	48,000	22
MRP 200	6,222	2,800	34	870	33	850	9.0	2.7	48,000	22	57,000	26
MRP 250	7,654	3,500	37	930	33	850	9.1	2.8	57,000	26	79,000	36
MRP 350	9,365	4,300	40	1000	35	900	9.6	2.9	79,000	36	110,000	50
MRP 500****	13,400	6,100	44	1120	38	960	10.3	3.1	110,000	50	150,000	68
MRP 700****	17,425	7,900	52	1320	45	1150	11.6	3.5	150,000	68	189,000	86
MRP 1000	29,840	13,500	65	1650	57	1460	14.2	4.3	189,000	86	CONSULT	FACTORY
MRP 2000****	50,670	23,000	75	1900	75	1900	16.2	4.9	CONSULT	FACTORY	CONSULT	FACTORY
MRP 2500****	55,820	25,300	81	2050	75	1900	18.4	5.6	CONSULT	FACTORY	CONSULT	FACTORY

<sup>\*</sup>Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

<sup>\*\*</sup> Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

<sup>\*\*\*</sup> Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.