

THE CUTTING EDGE OF



CUSTOMER SERVICE

DUST DESTROYER 300-100-D

DUST DESTROYER

DIESEL



300FT+ THROW DISTANCE

- Dimensions: 8.5'W x 8.9'L x 7'H
- Weight: 7,630 lbs
- Engine: 100 HP Cummins QSF3.8L T4F Diesel Engine
- 37,500+ CFM Generated by 42 HP fan
- In-line filter included. (80 mesh, 177 micron)
- 1/2 HP, 12 VDC oscillator motor
- 10,100 feet per minute fan outlet air velocity

PRIMARY (30) NOZZLE RING

WATER PRESSURE (PSI)	40	60	80	100	120	140	150
WATER FLOW (GPM)	12.0	14.6	16.9	18.9	21.0	22.5	23.3

SECONDARY (6) NOZZLE RING

WATER PRESSURE (PSI)	40	60	80	100	120	140	150
STANDARD WATER FLOW (GPM)	30	37	43	47	52	55	57
OPTIONAL WATER FLOW (GPM)	60	73	85	95	104	111	114

TARGET



COVER



SOAK



FIREMAN HOSE NOZZLE



OUTER NOZZLE RING




OUTER NOZZLE RING + INNER NOZZLE RING
+ FIREMAN HOSE NOZZLE



FIREMAN HOSE NOZZLE



OUTER NOZZLE RING

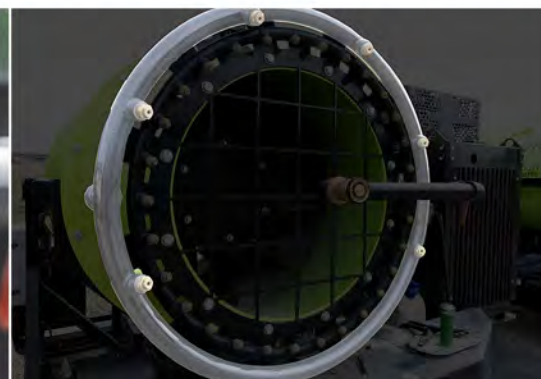

INNER NOZZLE RING



COMPANYWRENCH.COM

THE CUTTING EDGE OF



CUSTOMER SERVICE

DUST DEMOLISHER 200-480V-E



- Throw equals 20-200+ feet
- Coverage height is 0-75 feet
- 30 brass nozzles on primary water ring
- 6 brass nozzles on secondary soaking ring
- Separate ball valve control for each water ring
- In-line filter (40 mesh, 420 micron)
- Quick disconnect water fitting up to 2" diameter
- Water can be boosted by 150 PSI using the optional

PRIMARY (30) NOZZLE RING

WATER PRESSURE (PSI)	40	60	80	100	120	140	150
WATER FLOW (GPM)	10.0	12.3	14.1	16.0	17.5	18.7	19.2

SECONDARY (6) NOZZLE RING

WATER PRESSURE (PSI)	40	60	80	100	120	140	150
STANDARD WATER FLOW (GPM)	28	32	36	40	43	46	48



DUST DEMOLISHER

+



MOBILE GENERATOR

+



TRAILER

=

**FULLY
MOBILE**
(JUST ADD WATER)

FOR A SITE DEMONSTRATION OR MORE INFORMATION, CONTACT US!

ADD MY CONTACT INFO TO YOUR PHONE

MICHAEL GILMARTIN



VIEW OUR CURRENT INVENTORY AT

COMPANYWRENCH.COM



COMPANYWRENCH.COM