





### JARRAFF® All-Terrain Tree Trimmer

Designed for heavy-duty Right-of-Way maintenance and trimming.



### MINI-JARRAFF® Urban Tree Trimmer

Ideal for trimming urban landscapes and residential neighborhoods.



## LINEBACKER® Brush Cutter

Designed for land clearing, ROW maintenance, storm clean-up, and fire control.



JARRAFF.COM | 800-767-7112

## Jarraff FEATURES

The Jarraff's

MAINTENANCE-FREE
BOOM BELT DRIVE
SYSTEM offers quiet
operation, reduces
downtime and
requires only a
periodic adjustment.





The **CUMMINS QSF 3.8L 130HP TIER 4 DIESEL ENGINE** meets all EPA regulations, while improving overall fuel efficiency and roading speed. The engine positioning allows for easy access and service.



The Jarraff's **PUSH BLADE** features an improved approach angle and updated blade design for better field performance. Push button controls make brush clean-up fast and efficient.

## Jarraff FEATURES

## Jarraff's innovative TOUCH SCREEN CONTROL CENTER

gives the user unmatched operational input through features like keyless-password controlled starting, fingertip adjustable engine control, back up screen and more, all through a 7" screen





**INTERNALLY MOUNTED HOSE REEL** protects crucial hydraulic hoses from the elements and from any falling debris.

Patented ROTATING SAW HEAD rotates 180°, providing the operator unmatched cut quality, accuracy and speed. A specially designed tooth guard adds an additionally level of operator safety.





JARRAFF.COM | 800-767-7112

## 4-Wheel Drive SPECIFICATIONS

#### **ELECTRICAL SYSTEM**

- Power Requirements
- 12V DC

### **BOOM, SAW HEAD, WINCH & PUSH BLADE**

- Boom Construction High-tensile, non-conductive fiberglass
- Saw Blade Diameter 24 inches (610 mm)
- Saw Blade RPM 3200 RPM
- Push Blade 8 feet wide, hydraulically powered
- Winch 20,000 lb winch (9072 kg); 150 feet (45.7 m) of 5/8 inch (16 mm) cable included with chain and hook

#### **OPERATIONAL CAPACITIES**

- Maximum Cutting height 75 feet (22.9 m)
- Rotation 360° on turntable
- Rotation 180° on boom
- Controls Joysticks, Foot Travel Pedal and Service Brake

### PHYSICAL SPECIFICATIONS

Traveling Length - 41 feet 6 inches (12.65 m)


	4-Wheel Drive Model (Standard Tire Size – 28L x 26)
Undercarriage	Articulation
Weight	24,820 lbs (11,260 Kg) Full Wet Weight
<b>Ground Pressure</b>	6.7 PSI (0.46 Bar)
Width	Transport - 8 feet 6 inch (2.62 m) Operating - 10 feet 4 inch (3.15 m)
Carrier Length	25 ft (7.62 m)
Height	11 feet 6 inch (3.51 m)


### **ADDITIONAL TIRE SIZES AVAILABLE:**


Tire Size	<b>Ground Pressure</b>
23.1 x 26	8.2 PSI* (0.56 Bar)
67 x 3400 x 26	9.1 PSI* (0.63 Bar)
66 x 4300 x 25	5.3 PSI* (0.36 Bar)

<sup>\*</sup>Ground pressure @ 3" penetration and manufacturer recommended tire pressure

# 4-Wheel Drive SPECIFICATIONS



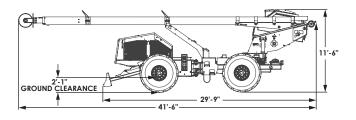





JARRAFF.COM | 800-767-7112

## Steel & Rubber Track SPECIFICATIONS

#### **ELECTRICAL SYSTEM**

- Power Requirements
- 12V DC

### **BOOM, SAW HEAD, WINCH & PUSH BLADE**

- Boom Construction High-tensile, non-conductive fiberglass
- Saw Blade Diameter 24 inches (610 mm)
- Saw Blade RPM 3200 RPM
- Push Blade 8 feet wide, hydraulically powered
- Winch 20,000 lb winch (9072 kg); 150 feet (45.7 m) of 5/8 inch (16 mm) cable included with chain and hook

### **OPERATIONAL CAPACITIES**


- Maximum Cutting height 75 feet (22.9 m)
- Rotation 360° on turntable
- Rotation 180° on boom
- Controls Foot Pedals and Joysticks


### PHYSICAL SPECIFICATIONS


Traveling Length - 41 feet 6 inches (12.65 m)

	Steel & Rubber Track
Undercarriage	Steel & Rubber Track
Weight	24,660 lbs (11,200 Kg) Full Wet Weight
<b>Ground Pressure</b>	3.0 PSI (0.207 Bar)
Width	8 feet 4 inch (2.54 m)
Carrier Length	21 ft (6.40 m)
Height	11 feet 3 inch (3.43 m)

## Steel & Rubber Track SPECIFICATIONS



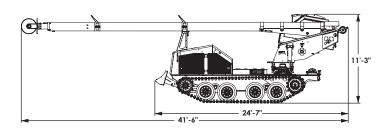





JARRAFF.COM | 800-767-7112

### PRODUCT SUPPORT

Quality parts and superior construction go into every piece of Jarraff equipment. Accessible machine design allows service work to be done quickly and easily, and a full maintenance schedule is included with each machine. Jarraff Industries equipment is field-proven in even the toughest



conditions and is backed by a knowledgeable service staff, ready to help you. Jarraff prides itself on OEM parts availability and next day air service from its 10,000 sq. ft. parts and service facility in St. Peter, MN to minimize your downtime. Jarraff's product support staff can walk you through repairs or arrange for a qualified field technician in your area. You can expect quality construction, service and support with everything you buy from Jarraff Industries.

Call Parts & Service: 800-767-7113

E-mail: parts@jarraff.com

### **AUTHORIZED SERVICE PROVIDERS**

Authorized service providers from Jarraff Industries offer experienced mechanics and Jarraff OEM parts making it easier than ever to maintain your equipment.

### **Services Offered:**

- Boom repair
   Part installation
- General maintenance Hydraulic service & more

Maximize productivity and extend the life of your Jarraff equipment.

Your Jarraff Product Support specialist will be happy to arrange for service at one of our sixty-two Jarraff Authorized Service Centers.



JARRAFF.COM | 800-767-7112