

# Standard and Optional Equipment

●=Std ○=Opt

Category	Description	SK350LC-11	
		LC	
Engine	ISUZU 6HK1 (Tier IV Final certified)	●	
	Auto engine acceleration/deceleration	●	
	Auto Idle Stop	●	
Hydraulic system	3 work modes H, S, Eco	●	
	Power boost	●	
	Heavy lift mode	●	
	Hydraulic Pressure Release	●	
	Independent travel	●	
	Swing priority	●	
	Boom to arm regeneration	●	
	Auto warm-up system	●	
	Bi-direction (proportional hand control) and single-direction auxiliary hydraulics (nibbler and breaker)	●	
	Rotation hydraulics with proportional hand control	○	
	Hydraulic oil VG46	●	
	Cabin	Air suspension seat with heat	●
10-inch color monitor		●	
LED door light		●	
Automatic climate control		●	
Radio (AM/FM, AUX, USB, Bluetooth® and hands-free telephone)		●	
12V power outlet		●	
7 LED work lights: 2 on boom, 2 on cab front, 2 on rear counterweight, 1 on front right		●	
Working equipment	Standard HD boom 21'4" (6.50 m) with large diameter boom cylinder	●	
	Standard HD arm 10'10" (3.30 m) with rock guard	●	
	Short HD arm 8'6" (2.60 m) with rock guard	○	
	Long HD arm 13'7" (4.15 m) with rock guard	○	
Counterweight	Standard C/W 19,010 lb (8,620 kg) with swing flashers	●	
Undercarriage	31.5" (800 mm) triple grouser shoe	●	
	31.5" (800 mm) single grouser shoe	○	
	35.4" (900 mm) triple grouser shoe	○	
Safety	Lower swivel guard	●	
	Track guides (three per side)	●	
	ROPS cab (ISO 12117-2:2008)	●	
	Tilt opening top cab guard (Top guard level II ISO 10262:1998)	●	
	Bar-type front guard (Front guard level II ISO 10262:1998)	○	
	Mesh-type front guard (Front guard level I ISO 10262:1998)	○	
	Engine emergency stop switch	●	
	3-inch retractable seat belt	●	
	Seatbelt indicator on display	●	
	Travel alarm	●	
	Swing flashers in counterweight	●	
	Left and right side mirrors	●	
	3-side 270-degree camera system	●	
	Hose burst valve for boom and arm cylinder	○	
Others	Angled upper deck guards	●	
	Machine Guidance ready brackets	●	
	Quick coupler piping ready brackets	●	
	ISO to BHL pattern changer	●	
	Battery disconnect switch	●	
	KOMEXS Machine Monitoring	●	
	4 Year or 4,000 Hour Warranty	●	
Single pedal travel	●		

Note: Bluetooth® is a registered trademark of the Bluetooth SIG Inc.

Note: This catalog may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice.

Copyright by KOBELCO CONSTRUCTION MACHINERY CO., LTD. No part of this catalog may be reproduced in any manner without notice.

## KOBELCO CONSTRUCTION MACHINERY U.S.A. INC.

22350 Merchants Way, Katy, TX 77449  
 Tel: 281-888-8430 Fax: 281-506-8713  
 www.KOBELCO-USA.com

Inquiries To:

KOBELCO is the corporate mark used by Kobe Steel on a variety of products and in the names of a number of Kobe Steel Group companies.

Bulletin No. SK350LC-11-NA-101-2206\*\*E\*

# KOBELCO

## Hydraulic Excavator -11 SERIES

# SK350 LC


Performance  Design

■ **Bucket Capacity:**  
0.875–2.75 cu.yd. SAE

■ **Engine Power:**  
265 hp {198 kW} @ 1,900 rpm  
(SAE NET)

■ **Operating Weight:**  
84,200 lb {38,200 kg}



Complies with the latest exhaust emission regulations 



# Performance Design

## PERFORMANCE BY DESIGN

The next generation of KOBELCO excavators brings together superior performance and thoughtful design like never before. Performance enhancements offer greater efficiency and productivity along with increased speed. Design improvements provide the ultimate in comfort and control.

KOBELCO refuses to compromise by creating machines that meet every challenge.





Lifting Capacity

34,010 lb  
{15,420 kg}

(Ground level over front @ 20')

Bucket Digging Force


56,200 lb  
{250 kN}

(with power boost engaged)

EXCEPTIONAL PERFORMANCE JUST GOT EVEN BETTER

Higher Efficiency, Plus a Tier IV Final Compliant Engine

The new SK350LC is equipped with a Isuzu Tier IV Final compliant engine, which has a higher torque value. Superior balance between engine output and torque contributes to more efficient performance than the previous models. In addition, the DPF replacement interval has been extended.

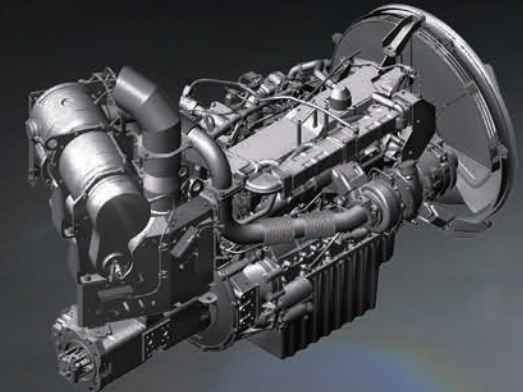


Model: ISUZU 6HK1

Engine Output

265 hp {198 kw} / 1,900 rpm (SAE NET)

Independent Travel

Selecting Independent Travel dedicates one hydraulic pump to travel and one to the attachment on a continuous basis, allowing for a smooth and constant movement speed even while swinging or using the boom or attachment. With Independent Travel, safely carrying a large pipe across a jobsite is a breeze.






## SAFETY ON FULL DISPLAY

### Standard 3 Sides Safety Camera System

Our high-resolution, large display shows right, left and rear side cameras together. Multiple display allows the operator to customize viewing needs to enhance operator awareness and jobsite safety.

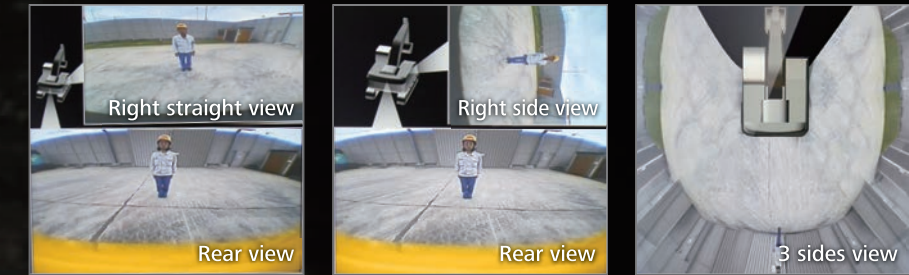


### Large 10-Inch Color Monitor

The easy-to-operate menu screen and recognizable icons assist the operator to select the most important information needed to ensure jobsite safety and machine control.



### Dial in the Right Information

Simply turn the jog dial to the right or left to select an operational feature, then press the dial to confirm selection.

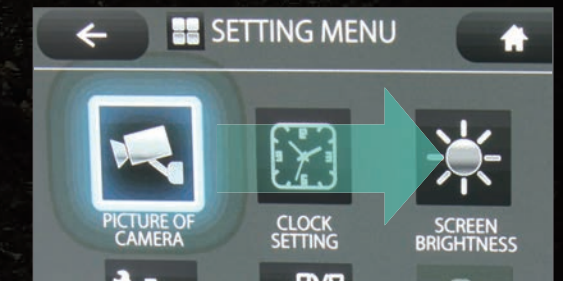



## PREMIER OPERATOR COMFORTS

### Heated Air Ride Suspension Seat

A 7-way adjustable seat achieves excellent shock absorption and superior ride comfort.

### Multi Vent Air Conditioner

Cool air is blown from multiple outlets toward the operator's body for more comfortable operation.

### Ergonomic Lever Angles

Operators can move levers horizontally without twisting their wrists, reducing fatigue.



### Adjustable Height Joysticks

Joystick height is manually adjustable to suit operator's preference.

### LED Interior Light

Interior lights turn on and off automatically when the door is open or the ignition is turned to the OFF position. This ensures safe entry and exit in the dark.

### Tilting Left Side Console

Flip-up left console with integrated pilot control lock lever tilts for easy entry and exit from the cab.



## THE ULTIMATE IN SIMPLE DESIGN

In our pursuit of functional beauty and styling, we created an all new interior design focused with the operator in mind.

### Jog Dial

This dial integrates multiple functions into a single, easy to use interface. Even with gloves on, the operator can make the adjustments they need.

### LED Illumination

Dials and buttons are now backlit to provide a bright, clear view in any lighting condition.



# GREATER MULTI-FUNCTION CAPABILITIES

## Attachment Mode Selection

The auxiliary flow rates for the bucket, breaker, nibbler and thumb are all now adjustable by the operator through the monitor, allowing you to change tools quickly and easily. Mode settings for other attachments like the tilt rotator can be added or changed.



# EASY MAINTENANCE




## Standard Overhead Top Guard Level II

The standard overhead cab guard can be tilted open with gas damper for easy window cleaning. Meets standard top guard level II requirements. (ISO 10262)



## Engine Maintenance

Lower service platform makes engine service easier.




## Two-Stage Air Filter



## DEF Tank

The DEF fill is located inside the locking tool box.



## Left Side (Radiator and Cooling System Elements)

Laid out for easy access to radiator and cooling system with clean out screen.



## Right Side (Ground Level Maintenance)

Hydraulic pump and engine filter compartment.



## Engine Oil Filter / Pre-Filter with Integrated Water Separator



## Fuel Filter

# DURABILITY YOU CAN TRUST


## Heavier Door Panels and Supports for Added Body Rigidity

Newly designed and reinforced rear right and left doors provide added protection for the radiator and pump compartments.



## Angled Upper Deck Guards

Angled upper deck guards run along the side of the upper body to protect door panels from impact and damage.

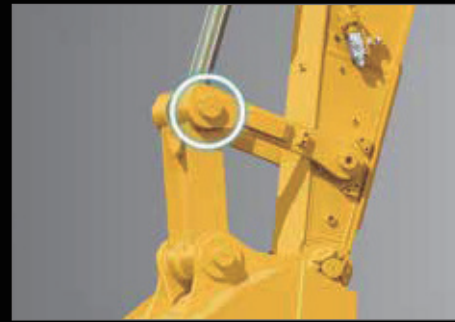

## Bucket Cylinder Rod Pin

The increased diameter of the bucket cylinder rod pin contributes to enhanced durability for various types of attachments.

\*Bucket pin dimensions have not changed from previous models.

## Total Support for Machines with Network Speed and Accuracy



KOMEXS is a telematics system for receiving machine information. Manage your machines anywhere in the world using the Internet. Location, workload and diagnostic data aid business operations.

### Direct Access to Operational Status

#### Location Data

Accurate location data can be obtained even from sites where communications are difficult.

#### Fuel Consumption Data

Data on fuel consumption and idling times can be used to indicate improvements in fuel consumption.

#### Operating Hours

A comparison of operating times of machines at multiple locations shows which locations are busier and more profitable. Operating hours on site can be accurately recorded, for running time calculations needed for rental machines, etc.

#### Graph of Work Content

The graph shows how working hours are divided among different operating categories, including digging, idling, traveling, and optional operations (NGB).



### Maintenance Data and Warning Alerts

#### Machine Maintenance Data

Provides maintenance status of separate machines operating at multiple sites. Maintenance data is also relayed to KOBELCO service personnel, for more efficient planning of periodic servicing.

#### Security System

##### Engine Start Alarm

Sends a notification if the engine is started outside of pre-defined hours.


##### Area Alarm

Sends a notification if the machine leaves a pre-defined area.


# SAFETY AND CONVENIENCE IN EVERY CORNER



Rear camera



Right camera



Left camera

## Standard Rear, Left and Right Side Cameras



## Swing Flashers for a Safer Jobsite


Standard swing flashers notify ground workers that the machine is swinging.



## Travel Alarm




## Single Pedal Travel

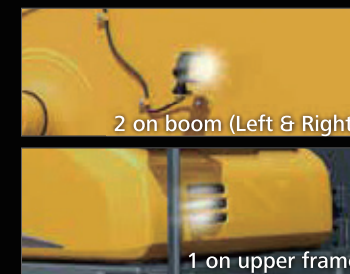

2 on boom (Left & Right)

1 on upper frame

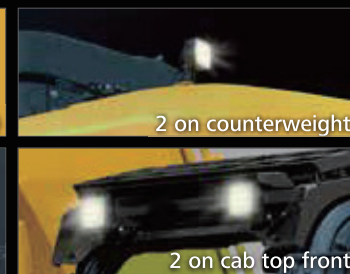

2 on counterweight

2 on cab top front

## Standard 7 LED Lights


Bright LED lights ensure visibility even during night work.



## Wire Mesh or Vertical Bar Front Cab Guard (optional)




## Battery Disconnect Switch with DEF Purge Notification Buzzer

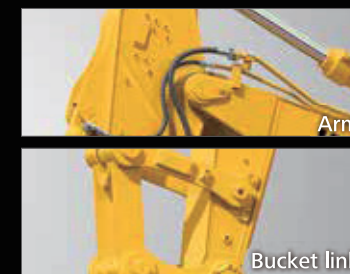

Arm

Bucket link

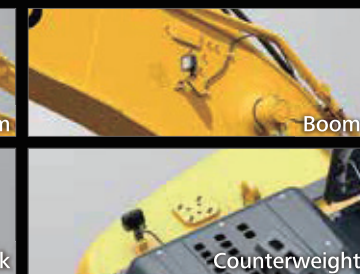

Boom

Counterweight

## Machine Guidance Ready Brackets

Pre-welded brackets for quicker and easier installation of Machine Guidance Systems.




## Quick Coupler Piping Brackets



## Adjustable Height Joystick Consoles

The operator can adjust height of attachment control levers.

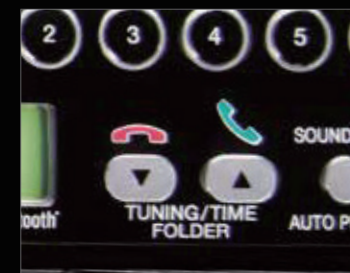

## Hands-Free Bluetooth® Phone Calls



## USB Charging Port / 12V Power Outlet



## Smartphone Holder

Includes USB port for charging.



# Specifications

## Engine

Model	ISUZU 6HK1
Type	Direct injection, water-cooled, 4-cycle diesel engine with turbocharger, intercooler, Tier IV Final certified
No. of cylinders	6
Bore and stroke	4.5" x 4.9" {115 mm x 125 mm}
Displacement	475.4 cu.in {7.790 L}
Rated power output	265 hp {198 kW} / 1,900 rpm (SAE NET) 282 hp {210 kW} / 1,900 rpm (Without fan)
Max. torque	745 lb-ft {1,011 N·m} / 1,500 rpm (SAE NET) 797 lb-ft {1,080 N·m} / 1,500 rpm (Without fan)

## Hydraulic System

Pump	
Type	Two variable displacement pumps + one gear pump
Max. discharge flow	2 x 77.7 gpm {2 x 294 L/min} 1 x 5.0 gpm {1 x 19 L/min}
Relief valve setting	
Boom, arm and bucket	4,970 psi {34.3 MPa}
Power Boost	5,480 psi {37.8 MPa}
Travel circuit	4,970 psi {34.3 MPa}
Swing circuit	4,210 psi {29.0 MPa}
Control circuit	725 psi {5.0 MPa}
Pilot control pump	Gear type
Main control valve	8-spool
Oil cooler	Air cooled type

## Swing System

Swing motor	Axial piston motor
Brake	Hydraulic; locking automatically when the swing control lever is in neutral position
Parking brake	Oil disc brake, hydraulic operated automatically
Swing speed	10.0 rpm
Swing torque	88,500 lb-ft {120 kN·m}

## Hydraulic P.T.O.

Specification	Output	Maximum pressure psi {MPa}	Max. flow U.S. gpm, {lpm}
			(0 pressure)
Auxiliary		4,970 {34.3}	2 x 77.7 {2 x 294}
Rotation		3,263 {22.5}	11.7 {44.3}

## Travel System

Travel motors	2 x axial-piston, two-step motors
Travel brakes	Hydraulic brake per motor
Parking brakes	Oil disc brake per motor
Travel shoes	48 each side
Travel speed	3.7/2.2 mph {5.8/3.6 km/h}
Drawbar pulling force	71,900 lb {320 kN}
Gradeability	70% {35°}

## Cab & Control

Cab	
All-weather, sound-suppressed steel cab mounted on silicon-sealed viscous mounts and equipped with a heavy, insulated floor mat.	
Control	
Two hand levers and two foot pedals for travel	
Two hand levers for excavating and swing	
Electric rotary-type engine throttle	

## Boom, Arm & Bucket

Boom cylinders	5.9" {150 mm} x 5'1" {1,542 mm}
Arm cylinder	6.7" {170 mm} x 5'10" {1,788 mm}
Bucket cylinder	5.9" {150 mm} x 3'11" {1,193 mm}

## Refilling Capacities & Lubrications

Fuel tank	132.9 U.S.gal {503 L}
Cooling system	10.8 U.S.gal {41 L}
Engine oil	12.8 U.S.gal {48.6 L}
Travel reduction gear	2 x 2.1 U.S.gal {8 L}
Swing reduction gear	2.0 U.S.gal {7.4 L}
Hydraulic oil tank	64.7 U.S.gal {245 L}: Tank oil level
	108.3 U.S.gal {410 L}: Hydraulic system
DEF tank	21.9 U.S.gal {83 L}

## Working Ranges

Unit: ft-in (m)

Range	Arm	21'4" {6.50m}		
		Short 8'6" {2.60m}	Standard 10'10" {3.30m}	Long 13'7" {4.15m}
a-Max. digging reach		34'10" {10.61}	36'11" {11.26}	39'3" {11.97}
b-Max. digging reach at ground level		34'1" {10.40}	36'3" {11.06}	38'8" {11.79}
c-Max. digging depth		21'10" {6.65}	24'1" {7.35}	26'11" {8.21}
d-Max. digging height		34'3" {10.45}	35'5" {10.79}	35'11" {10.94}
e-Max. dumping clearance		23'8" {7.22}	24'9" {7.55}	25'5" {7.74}
f-Min. dumping clearance		11'3" {3.43}	8'11" {2.72}	6'1" {1.86}
g-Max. vertical wall digging depth		19'2" {5.84}	21'7" {6.58}	23'10" {7.27}
h-Min. swing radius		14'1" {4.28}	13'7" {4.14}	13'11" {4.25}
i-Horizontal digging stroke at ground level		13'10" {4.21}	19'1" {5.82}	23'8" {7.21}
j-Digging depth for 8' {2.4 m} flat bottom		21'3" {6.48}	23'7" {7.20}	26'6" {8.08}
Bucket capacity SAE heaped cu.yd. {m³}		2.09 {1.60}	1.83 {1.40}	1.57 {1.20}

## Digging Force (ISO 6015)

Unit: lb (kN)


Arm length		Short 8'6" {2.60m}	Standard 10'10" {3.30m}	Long 13'7" {4.15m}
Bucket digging force	SAE		45,900 {204}	50,600 {225}*
	ISO		51,000 {227}	56,200 {250}*
Arm crowding force	SAE	44,100 {196}	37,100 {160}	30,800 {137}
	ISO	48,600 {216}*	39,600 {176}*	33,700 {150}*
		45,900 {204}	37,100 {165}	31,500 {140}
		50,600 {225}*	40,700 {181}*	34,600 {154}*

\*Power Boost engaged.

## Dimensions

Unit: ft-in (mm)

Arm length	Short 8'6" {2.60m}	Standard 10'10" {3.30m}	Long 13'7" {4.15m}
A Overall length	37'4" {11,380}	37'1" {11,300}	
B Overall height (to top of boom)	12'1" {3,690}	11'3" {3,420}	11'9" {3,580}
C Overall width		11'1" {3,390}**	
D Overall height (to top of cab)		10'6" {3,200}	
E Ground clearance of rear end*		3'11" {1,200}	
F Ground clearance*		19'3" {490}	

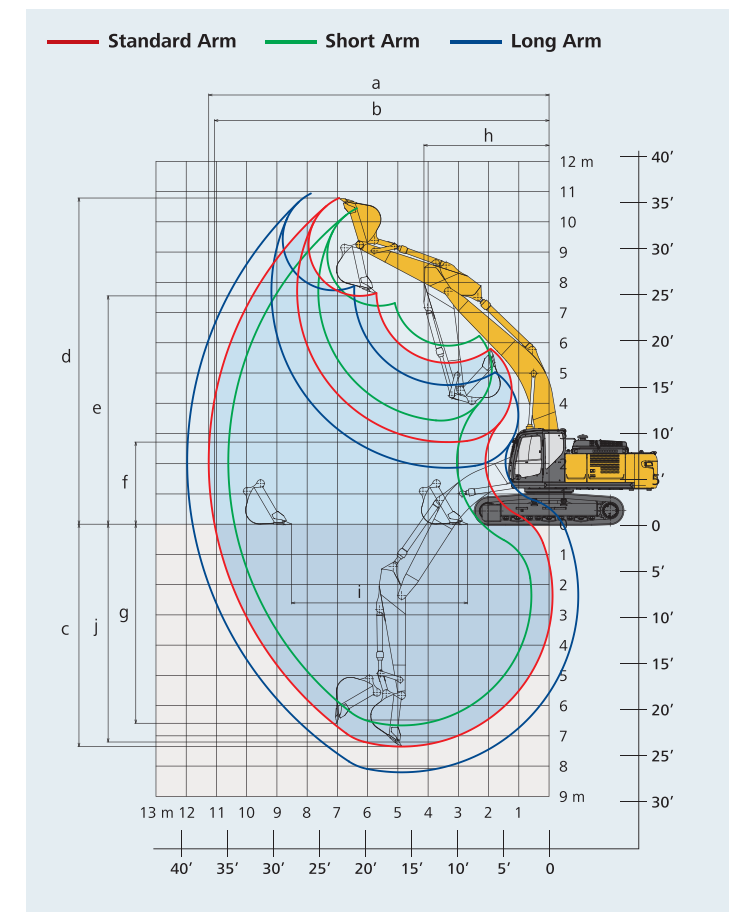

G Tail swing radius	11'10" {3,600}
G' Distance from center of swing to rear end	11'10" {3,600}
H Tumbler distance	13'3" {4,050}
I Overall length of crawler	16'3" {4,960}
J Track gauge	8'6" {2,590}
K Shoe width	31.5" {800}/35.4" {900}
L Overall width of upperstructure	10'3" {3,120}

\*Without including height of shoe lug. \*\*Shoe width: 31.5" {800 mm}

