



CP SERIES


CONCRETE PULVERIZERS

SMART INVESTMENT, PROVEN RESULTS

The Concrete Pulverizers (CP) design efficiency uses existing excavator hydraulics for maximum crushing power with minimal investment. Providing controlled demolition and recycling of concrete bridge decks, walls, floor slabs, foundations, silos, culverts, pillars, encased beams, pre-cast structures, and railings.

CP SERIES

CONCRETE PULVERIZERS

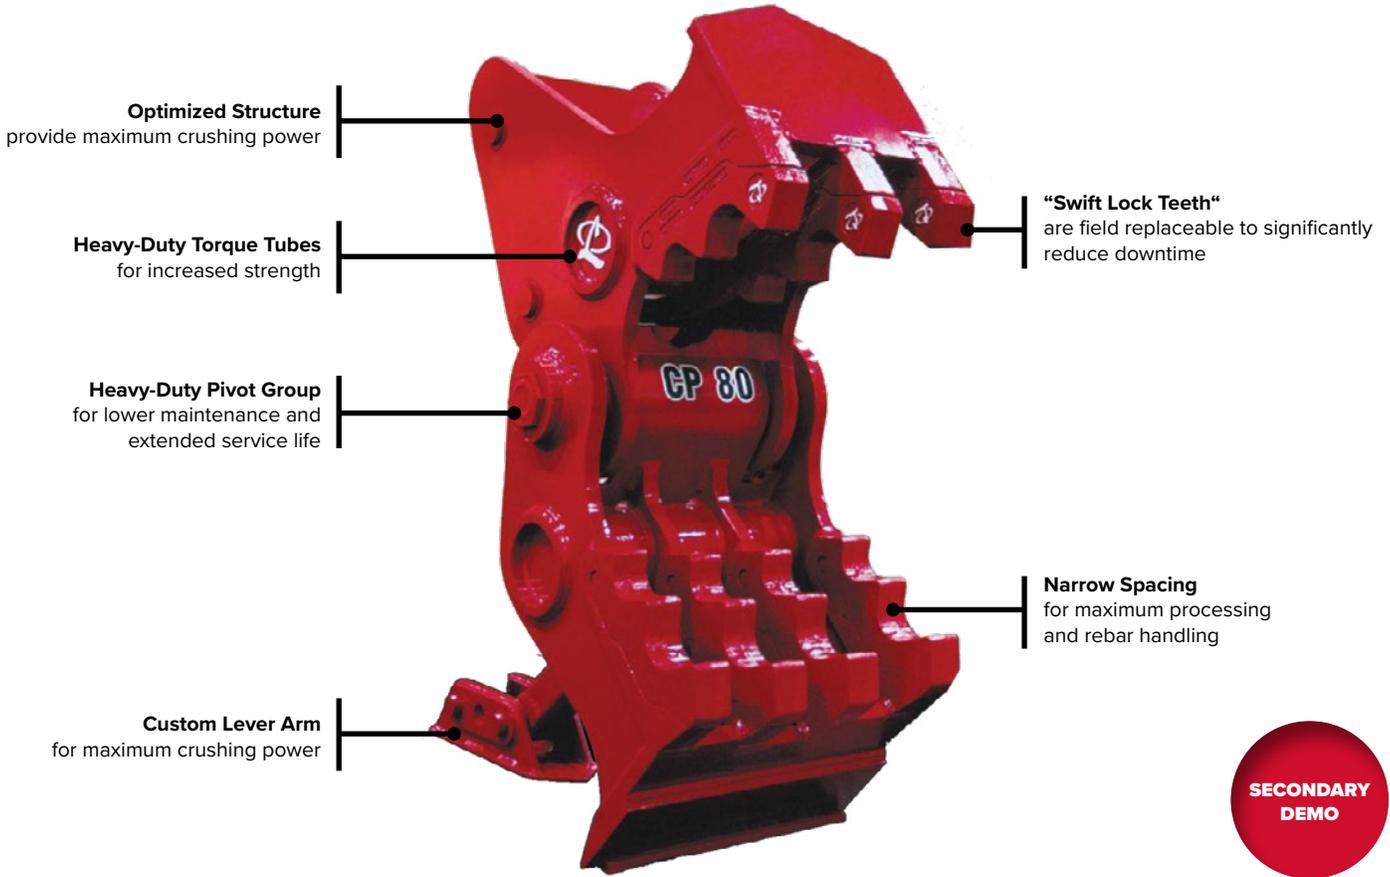

SPECIFICATION TABLE

Model	Weight		Jaw Opening*		Jaw Depth		Min Excavator Weight - 3rd Member	
	lbs	kg	in	mm	in	mm	lbs	m Tons
CP 40**	2,900	1,300	30	760	25	640	35,000	16
CP 60**	3,000	1,400	36	910	27	690	46,000	21
CP 80**	4,500	2,000	42	1070	29	740	64,000	29
CP 100**	6,200	2,800	48	1220	35	890	88,000	40
CP 120**	10,000	4,500	54	1370	40	1020	110,000	50

*Jaw openings vary based on excavator specific geometry.

** Cannot be used with QC

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

LABOUNTY

1538 Hwy 2 // Two Harbors, MN 55616 // 833-723-1843 // www.stanleyinfrastructure.com

2024.03.28