


CONTRACTOR GRAPPLES

PRECISE GRIPPING POWER

The time tested HDR Grapples are designed for rugged use with a two-tine, movable upper half and a three-tine stationary lower. This grapple is the original workhorse of the industry and extremely versatile.

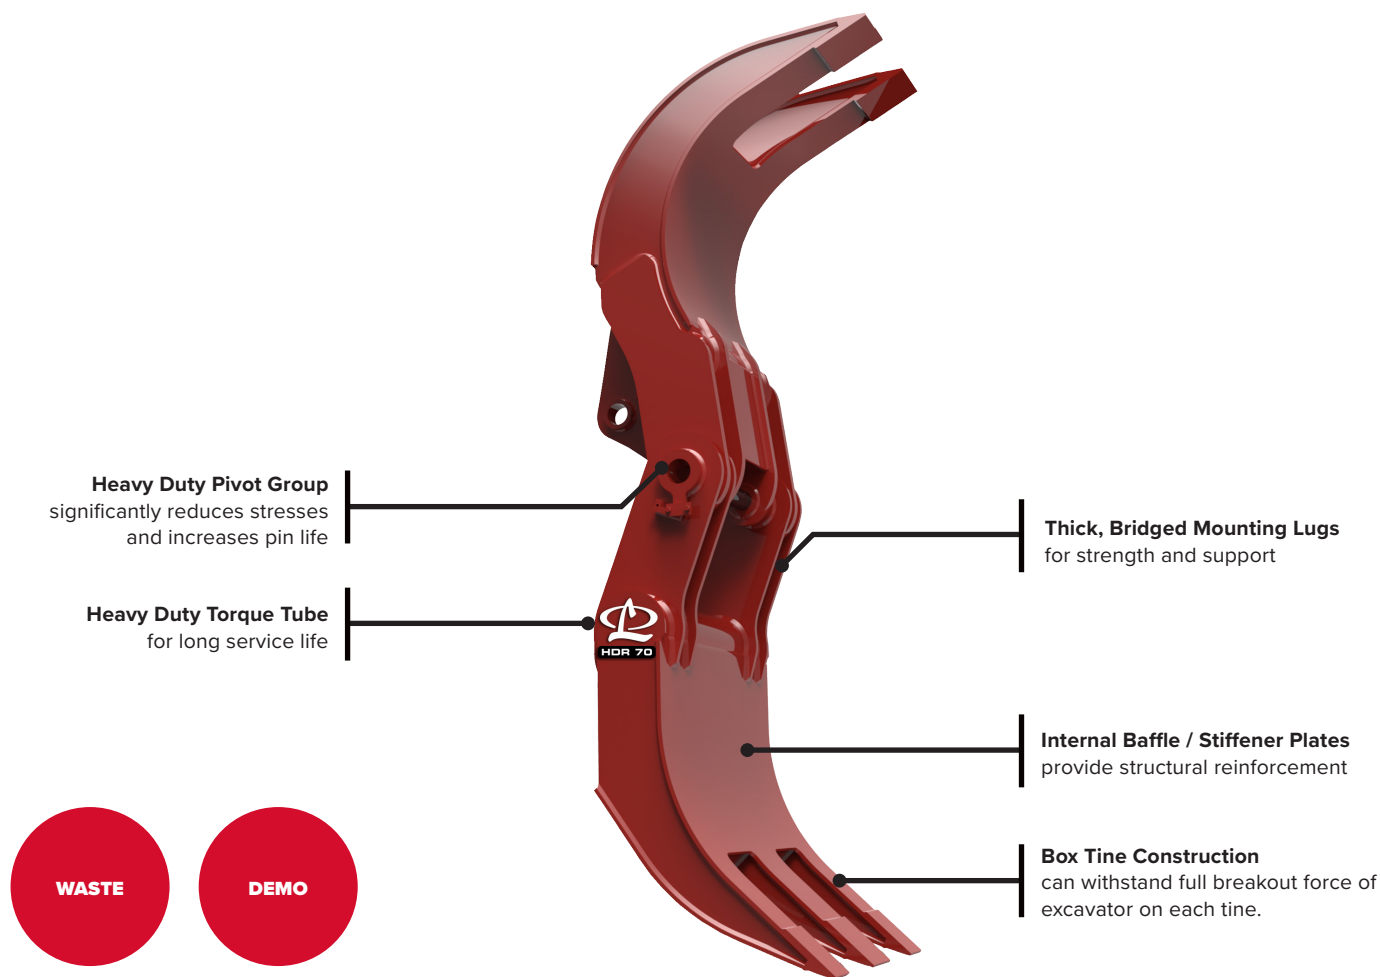

Model	Weight*		Opening		Capacity**		Min Excavator Weight - 3 rd Member***		Max Excavator Weight - 3 rd Member***	
	lbs	kg	in	mm	yd ³	m ³	lbs	m Tons	lbs	m Tons
HDR 30	1,700	800	88	2240	1.0 - 1.5	0.8 - 1.1	25,000	12	35,000	16
HDR 40	3,000	1,400	95	2410	2.0 - 3.0	1.5 - 2.3	35,000	16	46,000	21
HDR 50	3,800	1,700	113	2870	2.5 - 3.5	1.9 - 2.7	46,000	21	65,000	30
HDR70	5,500	2,500	116	2950	3.5 - 5.5	2.7 - 4.2	65,000	30	88,000	40
HDR 100	6,300	2,900	142	3610	5.5 - 6.5	4.2 - 5.0	88,000	40	110,000	50
HDR 170	9,000	4,100	150	3810	7.0 - 9.0	5.4 - 6.9	110,000	50	180,000	82
HDR 200	12,000	5,400	150	3810	7.0 - 9.0	5.4 - 6.9	180,000	82	CONSULT FACTORY	
HDR 900	39,000	17,700	210	5330	17.0 - 20.0	13.0 - 15.3	CONSULT FACTORY		CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

**Jaw Opening and capacity will vary depending on excavator mounting and the make up of the material being handled.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.