



**LABOUNTY®**

# LMB SERIES


## MOUNTED BREAKERS

### DEMOLITION SOLUTIONS

The LaBounty® breaker line is purposefully designed to withstand the most demanding applications for all-day, everyday use. With the latest technologies and heavy-duty housing designs standard on most models, these breakers are destined to become the preferred choice for primary and secondary demolition, trenching, tunneling, and boulder breaking.

# LMB SERIES

# MOUNTED BREAKERS

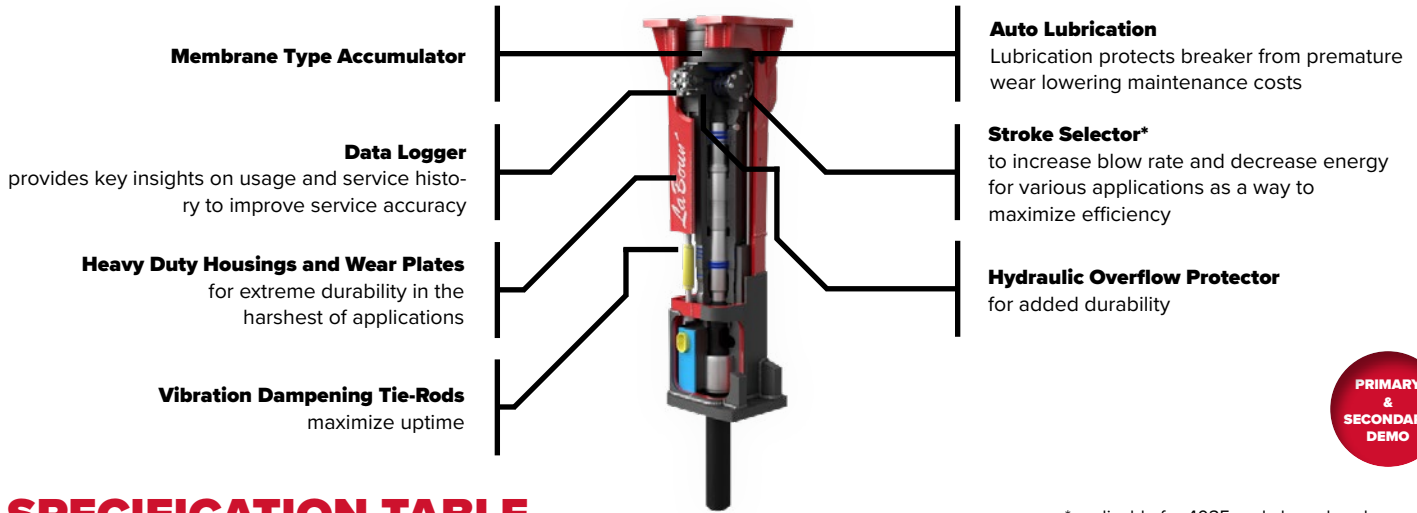

## SPECIFICATION TABLE

\*applicable for 4035 and above breakers only

Model	Weight*		Impact Energy**		Flow Range	Pressure Range	Impact Rate (BPM)**	Tool Diameter		Min Excavator Weight - 3rd Member***	
	lbs	kg	ft-lb	J	GPM	PSI	BPM	Ø in	Ø mm	lbs	mTons
LMB 1308	1,200	500	1,200	1,600	13-40	1,450-2,030	500-1,700	3.5	90	15,000	7
LMB 2015	2,400	1,100	2,500	3,400	24-34	1,960-2,100	540-920	4.5	115	26,000	12
LMB 2620	3,100	1,400	3,500	4,700	32-48	2,030-2,320	430-790	4.9	125	35,000	16
LMB 3025	3,900	1,800	5,000	6,800	37-53	1,960-2,105	450-750	5.3	135	46,000	21
LMB 4035	5,300	2,400	8,000	10,800	42-66	2,175-2,320	370-630	5.6	142	57,000	26
LMB 5545	7,500	3,400	11,000	14,900	66-93	2,175-2,320	400-560	6.5	166	77,000	35
LMB 8055	10,500	4,800	13,000	17,600	74-100	2,320-2,465	370-530	7.5	190	95,000	43
LMB 9580	16,310	7,400	16,000	21,700	95-119	2,465-2,610	290-510	8.5	215	154,000	70


\* Weight includes excavator mounting bracket.

\*\* Impact values are dependent on base machine hydraulics.

\*\*\* Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

## CARRIER RANGES

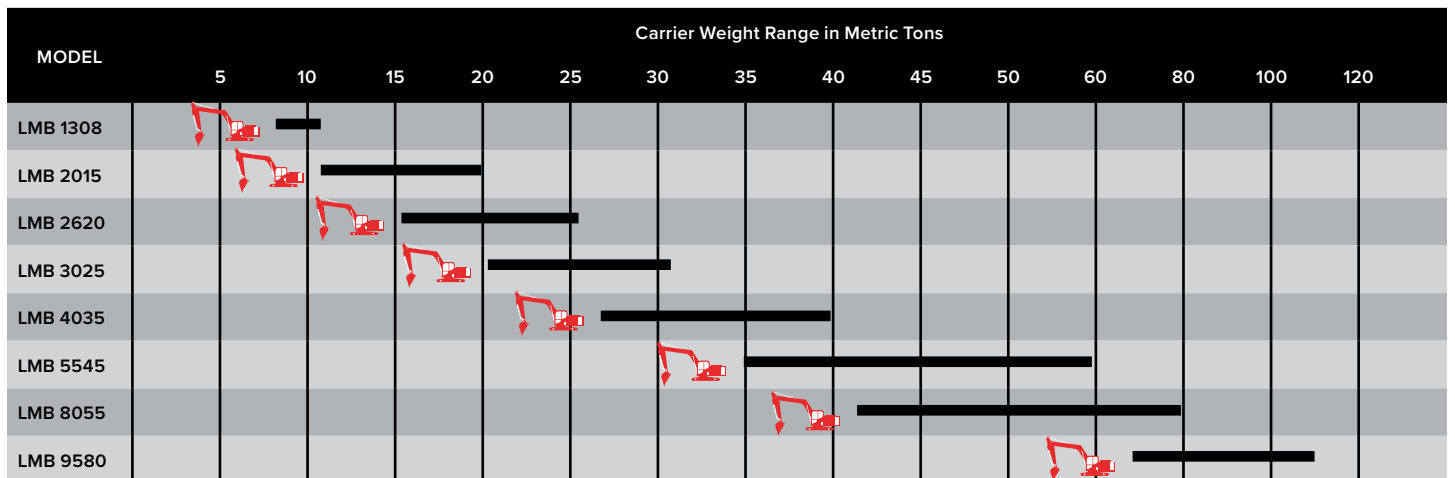

# LABOUNTY

1538 Hwy 2 // Two Harbors, MN 55616 // 833-723-1843 // [www.stanleyinfrastructure.com](http://www.stanleyinfrastructure.com)