

LMB

MOUNTED BREAKERS

LMB SERIES


MOUNTED BREAKERS

HARD HITTING RELIABILITY

The LaBounty breaker line is designed for all day, everyday use in the most demanding applications. With heavy-duty housing designs and the latest technologies standard on most models, these breakers are destined to become the tool of choice for primary and secondary demolition, trenching, tunneling and boulder breaking.



FEATURES & BENEFITS



Fixed Impact Energy Valve

allows for use on a wider range of carriers

Heavy Duty Housings and Wear Plates

for extreme durability in the harshest of applications

Vibration Dampening Tie-Rods

maximizes uptime

Underwater Capable to increase versatility



Stroke Selector*

to increase blow rate and decrease energy for various applications as a way to maximize efficiency

NEW

Idle Blow Protector

prevents blank firing

Sound Suppressed Housings

dampen operating volume

Hydraulic Overflow Protector

for added durability

*applicable for 4035 and above breakers only



PREMIUM IS OUR STANDARD



AUTO LUBRICATION

At LaBounty we know that good maintenance is critical to your profitability. That's why we've made auto-lubrication standard on most medium and large sized breakers*. The breaker-mounted, large capacity lubrication device automatically provides grease to the tool and bushings.

DATA LOGGER

Knowing that you can't manage what you don't measure, we've included a breaker mounted logging device on most medium and large sized breakers**. The Data Logger provides key insights on usage and service history to improve service accuracy.


*Excluding the LMB 1308 & LMB 9580 **Excluding the LMB 1308

SPECIFICATION TABLE

| Model | Weight* | | Impact Energy** | | Flow Range Range | Pressure Range | Impact Rate (BPM)** | Tool Diameter | | Excavator Weight - 3 rd Member*** | | |
|----------|---------|-------|-----------------|--------|---------------------|-------------------|------------------------|---------------|-----|--|---------------|---------------|
| | lbs | kg | ft·lb | J | | | | Øin | Ømm | | Min m Tons | Max m Tons |
| LMB 1308 | 1,200 | 500 | 1,200 | 1,600 | 13-40 | 1,450-2,030 | 500-1,700 | 3.5 | 90 | 15,000-28,000 | 7 | 12.5 |
| LMB 2015 | 2,400 | 1,100 | 2,500 | 3,400 | 24-34 | 1,960-2,100 | 540-920 | 4.5 | 115 | 26,000-44,000 | 12 | 20 |
| LMB 2620 | 3,100 | 1,400 | 3,500 | 4,700 | 32-48 | 2,030-2,320 | 430-790 | 4.9 | 125 | 35,000-57,000 | 16 | 26 |
| LMB 3025 | 3,900 | 1,800 | 5,000 | 6,800 | 37-53 | 1,960-2,105 | 450-750 | 5.3 | 135 | 46,000-70,000 | 21 | 32 |
| LMB 4035 | 5,300 | 2,400 | 8,000 | 10,800 | 42-66 | 2,175-2,320 | 370-630 | 5.6 | 142 | 57,000-88,000 | 26 | 40 |
| LMB 5545 | 7,500 | 3,400 | 11,000 | 14,900 | 66-93 | 2,175-2,320 | 400-560 | 6.5 | 166 | 77,000-132,000 | 35 | 60 |
| LMB 8055 | 10,500 | 4,800 | 13,000 | 17,600 | 74-100 | 2,320-2,465 | 370-530 | 7.5 | 190 | 95,000-176,000 | 43 | 80 |
| LMB 9580 | 16,310 | 7,400 | 16,000 | 21,700 | 95-119 | 2,465-2,610 | 290-510 | 8.5 | 215 | 154,000-242,000 | 70 | 110 |

^{*} Weight includes excavator mounting bracket.

CARRIER RANGES

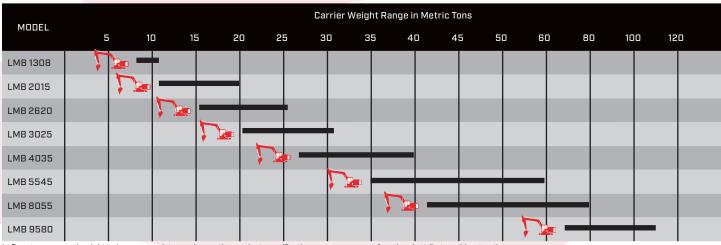

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.



^{**}Impact values are dependent on base machine hydraulics.
***Excavator weight range should be used as a guide only, all mounting configurations must be preapproved by LaBounty.



SETTING THE BAR FOR THE LAST 45 YEARS

Your Authorized LaBounty Dealer



1538 Highway 2 Two Harbors, MN, 55616 Tel. 1-800-522-5059







www.stanleyinfrastructure.com/brands/labounty