
# **MOBILE ROTATING PULVERIZERS**

## **PULVERIZE WITH POWER & SPEED**

With the MRP, users can take on diverse primary and secondary demolition projects with one, versatile tool. A short center of gravity and 360-degree rotation gives the MRP optimal maneuverability, while the jaw's design facilitates improved penetration and rapid material downsizing. Dual rotation motors offer superior holding power and durability, and replaceable wear areas encourage longevity and minimized maintenance.

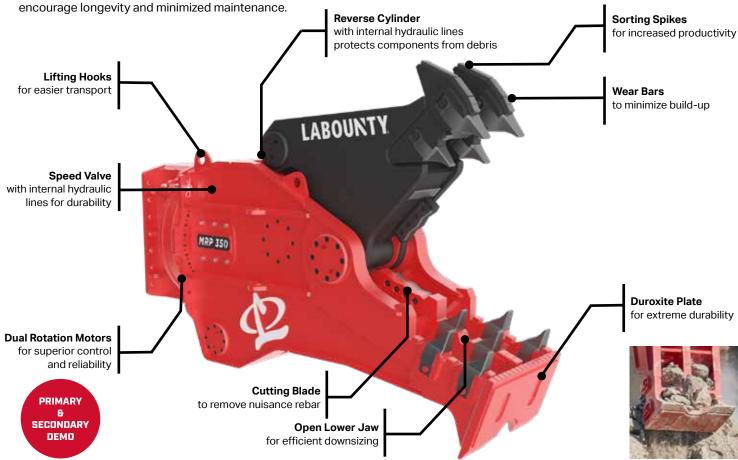

Model	Weight*		Jaw Opening		Reach**		Min Excavator Weight - 3rd Member***		
	lbs	kg	in	mm	ft	m	lbs	m Tons	
MRP 90****	2,285	1,000	26	660	6.0	1.8	20,000	9	
MRP 130****	3,100	1,400	28	710	6.8	2.1	29,000	13	
MRP 150	4,963	2,300	29	730	7.9	2.4	33,000	15	
MRP 200	6,222	2,800	34	870	9.0	2.7	48,000	22	
MRP 250	7,654	3,500	37	930	9.1	2.8	64,000	29	
MRP 350	9,365	4,300	40	1000	9.6	2.9	79,000	36	
MRP 500****	13,400	6,100	40	1000	10.3	3.1	110,000	50	
MRP 700****	17,425	7,900	52	1320	11.6	3.5	150,000	68	
MRP 1000	29,840	13,500	65	1650	14.2	4.3	189,000	86	
MRP 2000****	50,670	23,000	75	1900	16.2	4.9	DONOULT FACTORY		
MRP 2500****	55,820	25,300	81	2050	18.4	5.6	CONSULT FACTORY		


<sup>\*</sup>Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

#### \*\*\*\* Preliminary specs

# MDP SERIES LABOUNTY. MOBILE DEMOLITION PROCESSORS

### PROVEN CRUSHING & CRACKING POWER

The LaBounty Mobile Demolition Processors (MDP) is a highly powerful attachment for crushing and processing concrete in both primary and secondary demolition. The MDP provides **unmatched power-to-weight** for crushing the hardest concrete with smaller excavators, as compared to the competition. With patented Swift Lock Teeth makes maintenance quick and easy. The MDP design is based on the time-tested LaBounty shear and carries forward the legendary performance and durability that only LaBounty can deliver.

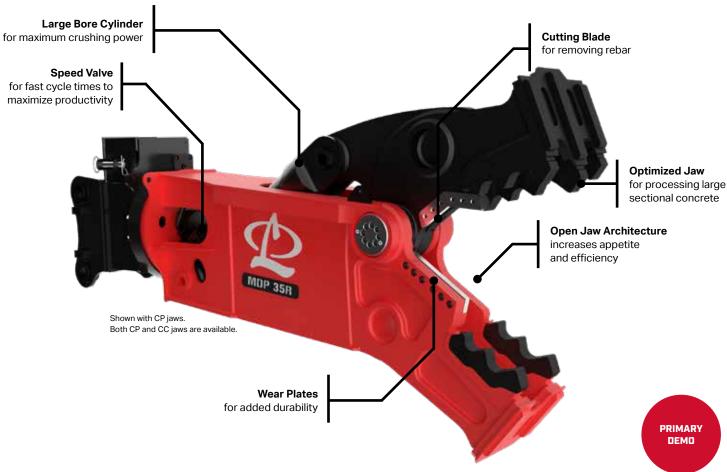

\*Speed valve not available on MDP 20 or MDP 27

Model	Weight*		Jaw 0	Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft	m	lbs	m Tons	
MDP 20 CC	4,600	2,100	25	640	27	690	9.8	3.0	40,000	18	
MDP 20 CP	5,250	2,400	25	640	27	690	9.8	3.0	40,000	18	
MDP 27 CC	6,300	2,900	32	810	31	790	9.6	2.9	55,000	25	
MDP 27 CP	6,950	3,200	28	710	30	760	9.6	2.9	55,000	25	
MDP 35 CC	8,250	3,700	38	970	36	910	11.3	3.4	70,000	32	
MDP 35 CP	9,000	4,100	34	860	36	910	11.3	3.4	70,000	32	
MDP 50 CC	12,400	5,600	50	1,270	45	1,140	13.1	4.0	99,000	45	
MDP 50 CP	13,900	6,300	50	1,270	45	1,140	13.1	4.0	99,000	45	

<sup>\*</sup>Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

<sup>\*\*</sup> Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

<sup>\*\*\*</sup> Excavator weight range should be used as a guide only, all mounting configurations must be preapproved by LaBounty

LaBounty reserves the right to improve, update, or change the product specificaitons, appearance, or functional attributes without notice.

<sup>\*\*</sup> Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw

<sup>\*\*\*</sup> Excavator weight range should be used as a guide only, all mounting configurations must be preapproved by LaBounty.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.