



LaBounty®

[www.stanleyinfrastructure.com/brands/labounty](http://www.stanleyinfrastructure.com/brands/labounty)



**UNCOMPROMISING**

**VERSATILITY**

**UPX**

**UNIVERSAL PROCESSORS**

### **DEMOLITION SOLUTIONS**


We know having the right tool for every application is critical to your profitability, that's why LaBounty invented the Universal Processor. Now, our next generation of processors is available, featuring the industry's best power-to-weight ratio for uncompromising power, control, and versatility. Whatever the job you need to tackle, LaBounty has the tool, with Universal Processors ranging from 6,300 to 45,000 pounds.

# UNIVERSAL PROCESSORS

**Hydraulic Cylinder and Swivel Seal**  
technology increase maintenance intervals by 2X

**360° Rotation with High Strength Fasteners**  
and a piloted turnable bearing for extreme durability

**Speed Valve**  
for fast cycle times

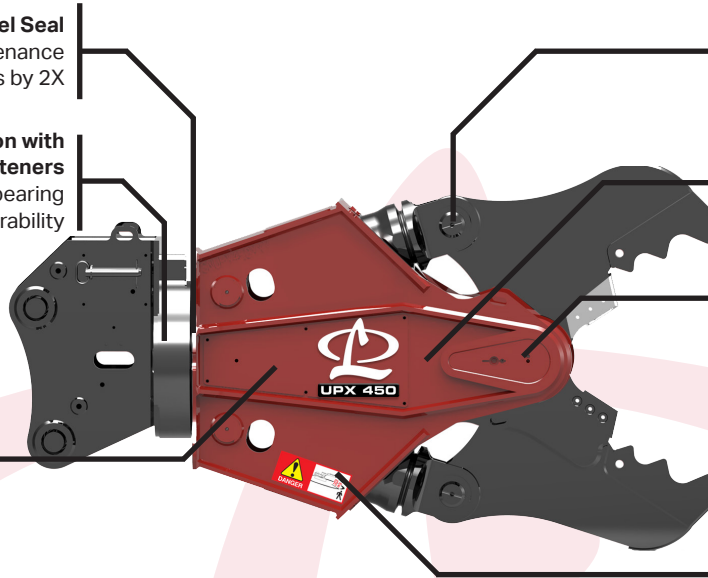

**Slotted Jaws**  
enables jaw change in less than 15 minutes

**Optimized Design**  
complements high performance excavators making this the tool of choice for high-reach applications

**Slotted Pivot**  
enables jaw change in less than 15 minutes

**Integral Cylinder Shrouds**  
to increase rod protection

## SPECIFICATION TABLE

Model	Jaw	Weight [With Jaw]*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight 3 <sup>rd</sup> Member***	
		lbs	kg	in	mm	in	mm	ft	m	lbs	m Tons
UPX 250	Shear (SH)	6,300	2,900	21	530	19	480	7.8	2.4	55,000	25
	Concrete Pulverizer (CP)	6,800	3,100	29	740	23	580	7.8	2.4	55,000	25
	Concrete Cracking (CC)	6,300	2,900	36	910	25	640	8.3	2.5	55,000	25
UPX 450	Shear (SH)	10,550	4,800	26	660	31	790	10.1	3.1	99,000	45
	Concrete Pulverizer (CP)	10,500	4,800	34	860	24	610	9.8	3.0	99,000	45
	Concrete Cracking (CC)	10,300	4,700	42	1,070	31	790	10.1	3.1	99,000	45
UPX 950	Shear (SH)	19,000	8,600	44	1,120	41	1,040	13.5	4.1	187,000	85
	Concrete Pulverizer (CP)	20,500	9,300	63	1,600	41	1,040	13.3	4.1	187,000	85
	Concrete Cracking (CC)	20,500	9,300	76	1,930	50	1,270	13.4	4.1	187,000	85
UPX 1800	Shear (SH)****	32,000	14,500	47	1,190	45	1,140	15.5	4.7	CONSULT FACTORY	
	Concrete Pulverizer (CP)****	36,000	16,300	81	2,060	52	1,320	15.5	4.7	CONSULT FACTORY	
	Concrete Cracking (CC) ****	32,000	14,500	100	2,540	59	1,500	15.5	4.7	CONSULT FACTORY	
UPX 2800 (HR)	Shear (SH)	45,000	20,400	51	1,300	52	1,320	19.5	5.9	CONSULT FACTORY	
	Concrete Cracking (CC) ****	45,000	20,400	95	2,410	60	1,520	19.5	5.9	CONSULT FACTORY	
UPX 2800	Shear (SH)****	55,000	25,000	51	1,300	52	1,320	20	6.1	CONSULT FACTORY	
	Concrete Cracking (CC)****	55,000	25,000	95	2,410	60	1,520	20	6.1	CONSULT FACTORY	

\*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

\*\* Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

\*\*\* Excavator weights should be used as a guide only, all mounting configurations must be preapproved by LaBounty.

\*\*\*\* Proposed specifications. Please consult the factory.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.



“When you expect the unexpected there is nothing else like the UPX.”

Jeff Fries, Total Wrecking & Environmental

