


CRUSHER BUCKET

BF120.4 S4







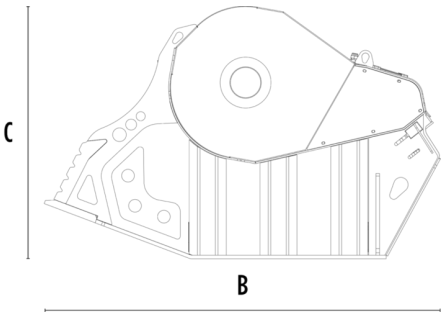

SPECIFICATIONS

Recommended excavator	lb	66,140 - 99,210
Weight	lb	10,582
Load capacity	cy	1.70
Pressure	PSI	3,191 - 4,061
Back pressure	PSI	< 145
Oil flow rate*	gal/min	50 - 66
Crusher mouth width	in	47
Crusher mouth height	in	21
Size A	in	64
Size B	in	86
Size C	in	55

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
24 V Iron Separator	24 Month Warranty

APPLICATION AREAS

- Demolitions and Renovations
- Road works and Infrastructures
- Quarries and Mines
- Urban Construction Sites
- Remote Areas and Complex Logistics
- Pipelines
- Inert materials recycling and Waste management
- Foundries
- Forest maintenance

EN

The data and images provided above are not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice. It is the responsibility of the installer to verify the suitability of the carrier machine with regard to the weight and specifications of the attachment.