



LaBounty®

www.stanleyinfrastructure.com/brands/labounty

PROVEN CRUSHING & CRACKING POWER

MDP

MOBILE DEMOLITION PROCESSORS


DEMOLITION SOLUTIONS

The LaBounty Mobile Demolition Processors (MDP) is a highly powerful attachment for crushing and processing concrete in both primary and secondary demolition. The MDP provides unmatched power-to-weight for crushing the hardest concrete with smaller excavators, as compared to the competition. The MDP design is based on the time-tested LaBounty shear and carries forward the legendary performance and durability that only LaBounty can deliver.

MDP SERIES



MOBILE DEMOLITION PROCESSORS

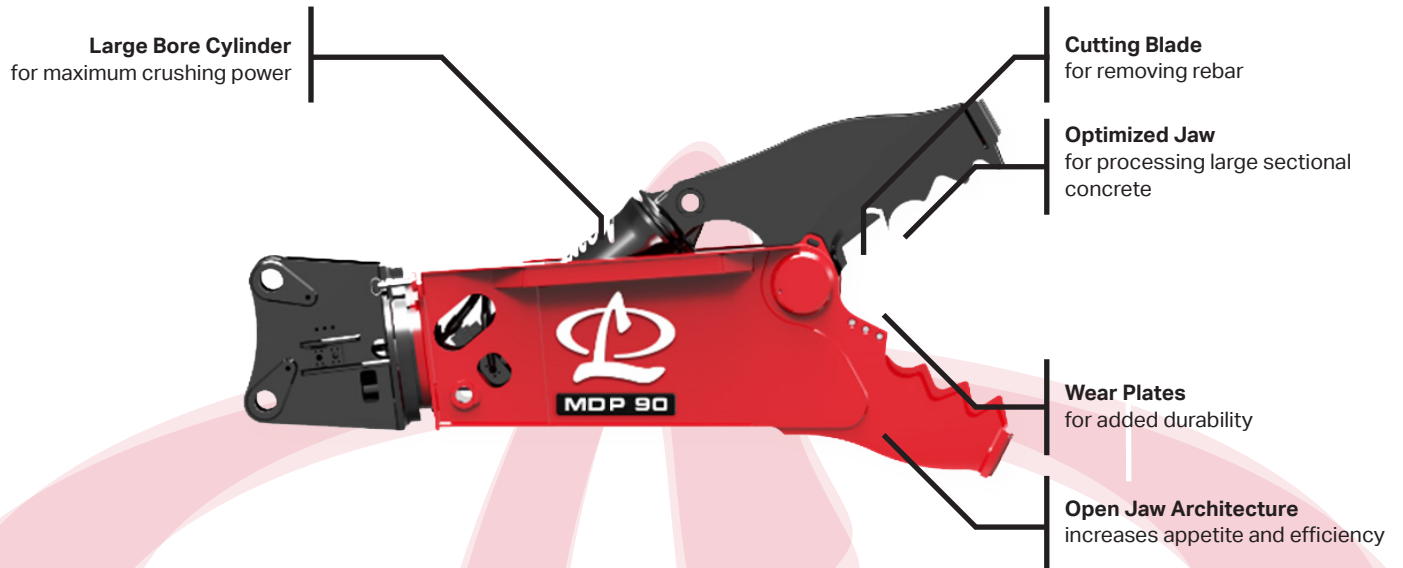

SPECIFICATION TABLE

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 3 rd Member***	
	lbs	kg	in	mm	in	mm	ft	m	lbs	m Tons
MDP 20 CC	4,600	2,100	25	640	27	690	9.8	3.0	40,000	18
MDP 20 CP	5,250	2,400	25	640	27	690	9.8	3.0	40,000	18
MDP 27 CC	6,300	2,900	32	810	31	790	9.6	2.9	55,000	25
MDP 27 CP	6,950	3,200	28	710	30	760	9.6	2.9	55,000	25
MDP 35 CC	8,250	3,700	38	970	36	910	11.3	3.4	70,000	32
MDP 35 CP	9,000	4,100	34	860	36	910	11.3	3.4	70,000	32
MDP 50 CC	12,400	5,600	50	1,270	45	1,140	13.1	4.0	99,000	45
MDP 50 CP	13,900	6,300	50	1,270	45	1,140	13.1	4.0	99,000	45
MDP 90 CP	21,000	9,500	56	1,420	49	1,240	15.2	4.6	187,000	85

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weights should be used as a guide only, all mounting configurations must be preapproved by LaBounty.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

The MDP is available in a complete range compatible with carriers from 18 to 85 metric tons.

Primary Demolition, Secondary Demolition, High Reach Demolition



www.stanleyinfrastructure.com/brands/labounty
1-800-522-5059

