

AUGER DRIVES



MINI-SKID LOADER AUGER DRIVES


MS11PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	24"	7 45	2,500 1,274	2" HEX -OR- 2-1/2" RND	3 YEARS
MIN HYD GPM	6 GPM	9 58	3,000 1,529		
MAX HYD GPM	12 GPM	11 71	3,500 1,783		
MAX HYD PSI	3500 PSI				
MS14PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	30"	12 50	2,500 1,825	2" HEX -OR- 2-1/2" RND	3 YEARS
MIN HYD GPM	10 GPM	15 61	3,000 2,190		
MAX HYD GPM	20 GPM	17 71	3,500 2,555		
MAX HYD PSI	3500 PSI				
MS18PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	36"	15 50	2,500 2,290	2" HEX -OR- 2-1/2" RND	3 YEARS
MIN HYD GPM	15 GPM	18 60	3,000 2,748		
MAX HYD GPM	25 GPM	20 67	3,500 3,206		
MAX HYD PSI	3500 PSI				



MINI-SKID LOADER AUGER DRIVE

IDEAL RPM RANGE


MODEL #	GPM						
	6	9	11	12	15	17	20
MS11PD	45	58	71				
MS14PD				50	61	71	
MS18PD					50	60	67

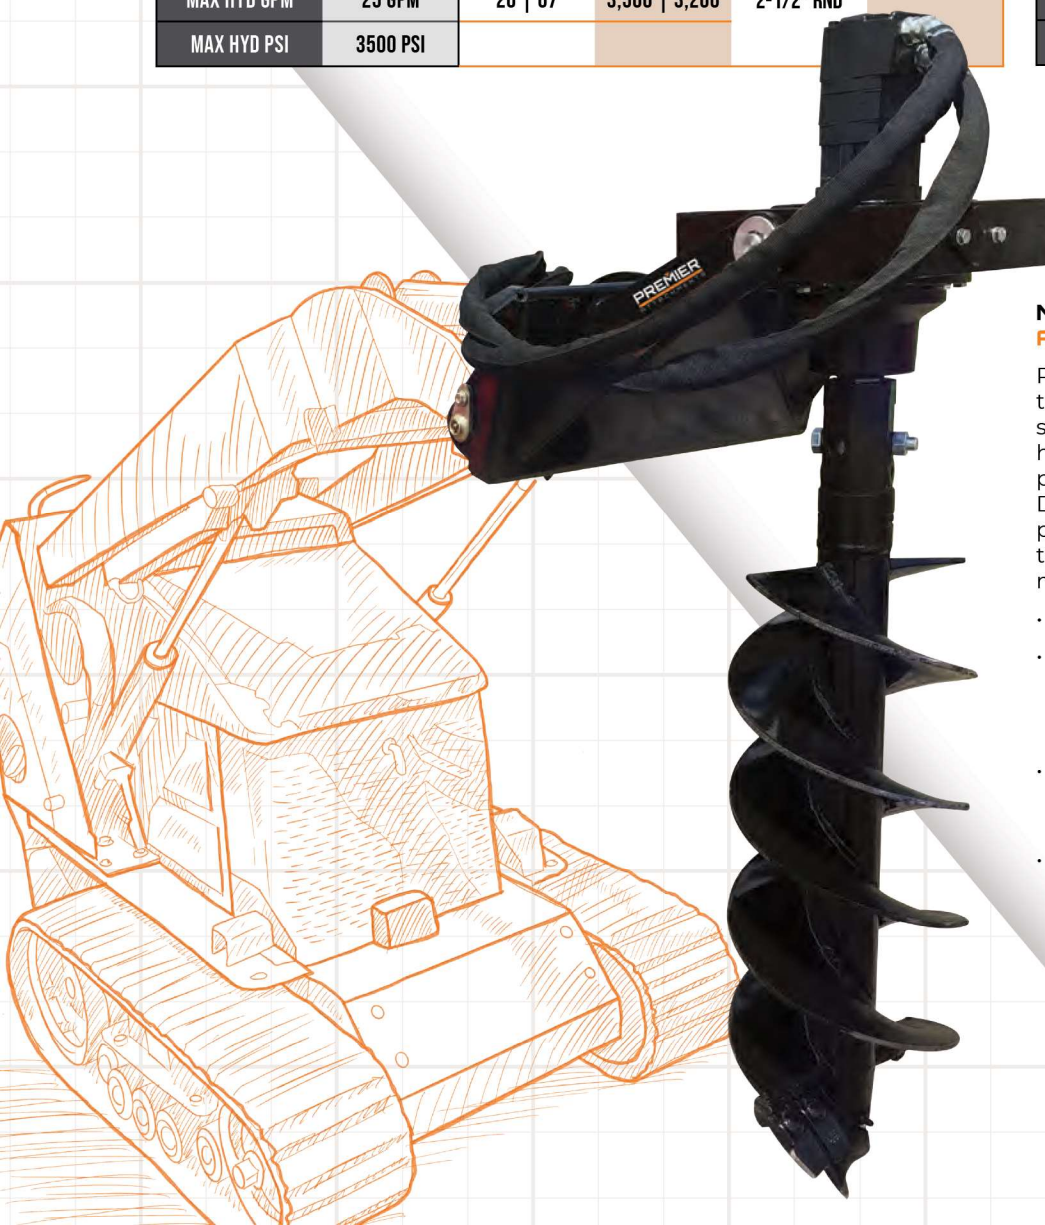

MINI-SKID LOADER AUGER DRIVES (MS-SERIES)

Premier Attachments produces three Mini Skid Steer Auger Drives specifically designed for the hydraulics GPM and PSI of this popular machine. These Medium-Duty Auger Drives are cost-effective, powerful, and designed to maximize the hydraulics of the various machinery available.

- 3 Year Warranty
- We offer mounting brackets that include the Universal Mini Skid Steer mount as well as the Bobcat MT mount
- A full range swivel that allows the auger to hang plumb to the ground at any angle
- Output shafts available in 2" hexagon and 2-9/16" round

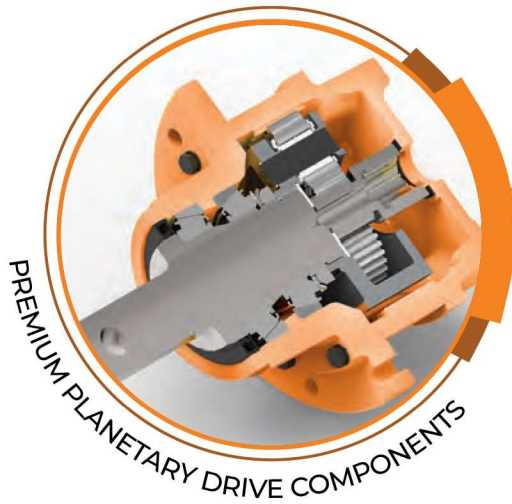

STANDARD DUTY AUGER DRIVES

MODEL		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MD06PD					
MAX AUGER DIAM	15"	5 52	2,500 734	2" HEX	3 YEARS
MIN HYD GPM	5 GPM	7 73	3,000 881		
MAX HYD GPM	10 GPM	9 93	3,500 1,028		
MAX HYD PSI	3500 PSI	10 104			
MD09PD					
MAX AUGER DIAM	18"	7 48	2,500 1,123	2" HEX	3 YEARS
MIN HYD GPM	7 GPM	9 61	3,000 1,347		
MAX HYD GPM	14 GPM	11 75	3,500 1,571		
MAX HYD PSI	3500 PSI	13 88			
MD12PD					
MAX AUGER DIAM	24"	9 49	2,500 1,409	2" HEX	3 YEARS
MIN HYD GPM	8 GPM	11 59	3,000 1,691		
MAX HYD GPM	17 GPM	13 71	3,500 1,972		
MAX HYD PSI	3500 PSI	15 81			
MD14PD					
MAX AUGER DIAM	30"	12 50	2,500 1,825	2" HEX -OR- 2-9/16" RND	3 YEARS
MIN HYD GPM	10 GPM	15 61	3,000 2,190		
MAX HYD GPM	20 GPM	17 71	3,500 2,555		
MAX HYD PSI	3500 PSI	20 83			
MD18PD					
MAX AUGER DIAM	36"	15 50	2,500 2,290	2" HEX -OR- 2-9/16" RND	3 YEARS
MIN HYD GPM	15 GPM	18 60	3,000 2,748		
MAX HYD GPM	30 GPM	20 67	3,500 3,206		
MAX HYD PSI	3500 PSI	25 83			

SKID STEER, TRACTOR, & MINI-EXCAVATOR EARTH AUGER DRIVES (MD-SERIES)

Premier Attachments offers five models in the Standard Duty MD-Series Auger Drives. The Standard Duty auger drive is designed for light to moderate drilling conditions at competitive prices.

- No drain line is required
- 3 Year Warranty
- All Auger Drives are designed and engineered for the higher hydraulic pressures of today's equipment
- Universal Skid Steer mount is an industry standard for all makes and models, however we do offer late model obsolete mounts for those older machines
- Output shafts available in 2" hexagon and 2-9/16" round

IDEAL RPM RANGE

MODEL #	GPM											
	6	7	9	10	11	12	13	15	17	18	20	25
MD06PD	62	73	93	104								
MD09PD		48	61		75	88						
MD12PD			49		59	71	81					
MD14PD						50	61	71		83		
MD18PD								50	60	67	83	



HEAVY DUTY AUGER DRIVES

H010PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	24"	8 48	2,500 1,274	2" HEX -OR- 2-9/16" RND	5 YEARS
MIN HYD GPM	6 GPM	10 60	3,000 1,529		
MAX HYD GPM	15 GPM	12 72	3,500 1,783		
MAX HYD PSI	3,500 PSI	15 90			
H015PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	30"	12 47	2,500 1,975	2" HEX -OR- 2-9/16" RND	5 YEARS
MIN HYD GPM	10 GPM	15 58	3,000 2,372		
MAX HYD GPM	25 GPM	17 66	3,500 2,768		
MAX HYD PSI	3,500 PSI	20 78			
H019PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	36"	15 46	2,500 2,481	2" HEX -OR- 2-9/16" RND	5 YEARS
MIN HYD GPM	15 GPM	18 56	3,000 2,977		
MAX HYD GPM	30 GPM	20 62	3,500 3,474		
MAX HYD PSI	3,500 PSI	25 77			
H024PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	36"	20 48	2,500 3,184	2" HEX -OR- 2-9/16" RND	5 YEARS
MIN HYD GPM	20 GPM	24 58	3,000 3,821		
MAX HYD GPM	35 GPM	26 63	3,250 4,140		
MAX HYD PSI	3,250 PSI	30 72			

IDEAL RPM RANGE

MODEL #	GPM									
	8	10	12	15	17	18	20	24	25	30
H010PD	48	60	72	90						
H015PD			47	58	66		78			
H019PD				46		56	62		77	
H024PD							48	58	63	72

SKID STEER & MINI-EXCAVATOR EARTH AUGER DRIVES (H0-SERIES)

Premier Attachments offers four models in the Heavy Duty H0-Series Auger Drives. The Heavy-Duty auger drives are built with industrial grade components for the toughest of drilling conditions.

- No drain line is required
- 5 Year Warranty
- All Auger Drives are designed and engineered for the higher hydraulic pressures of today's equipment
- Universal Skid Steer mount is an industry standard for all makes and models, however we do offer late model obsolete mounts for those older machines
- Output shafts available in 2" hexagon and 2-9/16" round
- Premier's proprietary Labyrinth Seal allows for multiple sealing surfaces within the seal to defend against dirt coming in and oil leaking out. The five different seals outperform the basic double seal used by other manufacturers.



LABYRINTH SEAL





HIGH FLOW/HIGH TORQUE AUGER DRIVES

H040PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	48"	20 53	2,500 2,861	2" HEX -OR- 2-1/2" HEX	5 YEARS
MIN HYD GPM	20 GPM	25 67	3,000 3,433		
MAX HYD GPM	45 GPM	30 80	3,500 4,005		
MAX HYD PSI	4,500 PSI	35 94	4,000 4,578		
H045PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	48"	25 53	2,500 3,624	2" HEX -OR- 2-1/2" HEX	5 YEARS
MIN HYD GPM	25 GPM	30 63	3,000 4,349		
MAX HYD GPM	45 GPM	35 74	3,500 5,074		
MAX HYD PSI	4,500 PSI	40 85	4,000 5,798		
H055PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	48"	35 58	2,500 4,578	2" HEX -OR- 2-1/2" HEX	5 YEARS
MIN HYD GPM	30 GPM	40 67	3,000 5,493		
MAX HYD GPM	60 GPM	45 75	3,500 6,409		
MAX HYD PSI	4,500 PSI	50 84	4,000 7,325		
H065PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	48"	40 54	2,500 5,722	2" HEX -OR- 2-1/2" HEX	3 YEARS
MIN HYD GPM	30 GPM	45 60	3,000 6,867		
MAX HYD GPM	60 GPM	50 67	3,500 8,011		
MAX HYD PSI	4,500 PSI	55 74	4,000 9,156		
H075PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	48"	40 43	3,000 8,527	2-1/2" HEX	3 YEARS
MIN HYD GPM	30 GPM	45 49	3,500 9,948		
MAX HYD GPM	60 GPM	50 54	4,000 11,369		
MAX HYD PSI	4,500 PSI	60 65	4,500 12,790		
H085PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	48"	40 54	2,500 8,957	2-1/2" HEX	3 YEARS
MIN HYD GPM	30 GPM	45 39	3,000 10,748		
MAX HYD GPM	60 GPM	50 43	3,500 12,539		
MAX HYD PSI	3,500 PSI	55 51			
H095PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	48"	45 30	2,500 11,213	2-1/2" HEX	2 YEARS
MIN HYD GPM	30 GPM	50 34	3,000 13,455		
MAX HYD GPM	60 GPM	55 37	3,500 15,698		
MAX HYD PSI	4,500 PSI	60 41	4,000 17,941		
H0120PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	48"	30 15	2,500 15,790	3" HEX -OR- 4" SQUARE	2 YEARS
MIN HYD GPM	30 GPM	45 22	3,000 18,949		
MAX HYD GPM	60 GPM	60 29	3,500 22,107		
MAX HYD PSI	3,500 PSI				
H0130PD		GPM RPM	PSI TORQUE	OUTPUTS	WARRANTY
MAX AUGER DIAM	48"	30 9	2,500 25,212	4" SQUARE	2 YEARS
MIN HYD GPM	30 GPM	45 14	3,000 30,254		
MAX HYD GPM	60 GPM	60 18	3,500 35,297		
MAX HYD PSI	3,500 PSI				



HIGH FLOW SKID STEER & EXCAVATOR EARTH AUGER DRIVES (H0-SERIES)

Premier Attachments offers nine models of the Heavy-Duty High flow Auger Drives. Our Heavy-Duty High Flow auger drives are specifically designed to maximize the high flow capability of torque and speed.

- No drain line is required
- 2, 3, and 5 Year Warranty
- All Auger Drives are designed and engineered for the higher hydraulic pressures of today's equipment
- Universal Skid Steer mount is an industry standard for all makes and models, however we do offer late model obsolete mounts for those older machines
- Output shafts available in 2" hexagon, 2-1/2" hexagon, 3" Hexagon, and 4" Square

IDEAL RPM RANGE

MODEL #	GPM									
	20	25	30	35	40	45	50	55	60	
H040PD	53	67	80	94						
H045PD		53	63	74	85					
H055PD				58	67	75	84			
H065PD					54	60	67	74		
H075PD					43	49	54	65		
H085PD					54	39	43	51		
H095PD						30	34	37	41	
H0120PD			15			22			29	
H0130PD				9		14			18	

TORQ-HUB INFORMATION ON PAGE 16

SKID STEER LOADERS

MINI SKID STEER LOADERS

TRACTOR LOADERS

BACKHOES

EXCAVATORS

MINI EXCAVATORS

AUGER DRIVES

2-SPEED AUGER DRIVES STANDARD FLOW

H203 2-SPEED		HIGH SPEED		LOW SPEED		OUTPUTS	WARRANTY
		GPM RPM	PSI TORQUE	GPM RPM	PSI TORQUE		
MAX AUGER DIAM	36"	13 82	2,500 1,219	13 40	2,500 2,448	2" HEX -OR- 2-1/2" HEX	2 YEARS
MIN HYD GPM	13 GPM	15 94	3,000 1,462	15 47	3,000 2,934		
MAX HYD GPM	17 GPM	17 107	3,500 1,706	17 53	3,500 3,426		
MAX HYD PSI	3,500 PSI						
H204 2-SPEED		HIGH SPEED		LOW SPEED		OUTPUTS	WARRANTY
		GPM RPM	PSI TORQUE	GPM RPM	PSI TORQUE		
MAX AUGER DIAM	48"	15 74	2,500 1,542	15 37	2,500 3,085	2" HEX -OR- 2-1/2" HEX	2 YEARS
MIN HYD GPM	15 GPM	17 84	3,000 1,851	17 42	3,000 3,702		
MAX HYD GPM	19 GPM	19 94	3,500 2,159	19 47	3,500 4,319		
MAX HYD PSI	3,500 PSI						
H205 2-SPEED		HIGH SPEED		LOW SPEED		OUTPUTS	WARRANTY
		GPM RPM	PSI TORQUE	GPM RPM	PSI TORQUE		
MAX AUGER DIAM	48"	17 66	2,500 1,985	17 33	2,500 3,965	2" HEX -OR- 2-1/2" HEX	2 YEARS
MIN HYD GPM	17 GPM	19 73	3,000 2,382	19 37	3,000 4,759		
MAX HYD GPM	21 GPM	21 81	3,500 2,779	21 40	3,500 5,552		
MAX HYD PSI	3,500 PSI						
H208 2-SPEED		HIGH SPEED		LOW SPEED		OUTPUTS	WARRANTY
		GPM RPM	PSI TORQUE	GPM RPM	PSI TORQUE		
MAX AUGER DIAM	48"	19 49	2,500 2,961	19 24	2,500 5,921	2" HEX -OR- 2-1/2" HEX	2 YEARS
MIN HYD GPM	19 GPM	22 57	3,000 3,553	22 28	3,000 7,106		
MAX HYD GPM	25 GPM	25 65	3,500 4,145	25 32	3,500 8,290		
MAX HYD PSI	3,500 PSI						

2-SPEED AUGER DRIVES HIGH FLOW/HIGH TORQUE

H215 2-SPEED		HIGH SPEED		LOW SPEED		OUTPUTS	WARRANTY
		GPM RPM	PSI TORQUE	GPM RPM	PSI TORQUE		
MAX AUGER DIAM	48"	30 26	2,500 7,895	30 12	2,500 11,843	2-1/2" HEX	2 YEARS
MIN HYD GPM	30 GPM	40 34	2,750 8,684	40 26	2,750 13,027		
MAX HYD GPM	50 GPM	50 43	3,500 9,471	50 33	3,500 14,211		
MAX HYD PSI	3,000 PSI						
H230 2-SPEED		HIGH SPEED		LOW SPEED		OUTPUTS	WARRANTY
		GPM RPM	PSI TORQUE	GPM RPM	PSI TORQUE		
MAX AUGER DIAM	48"	30 12	2,500 18,577	30 8	2,500 27,866	3" HEX	2 YEARS
MIN HYD GPM	30 GPM	40 17	2,750 20,435	40 11	2,750 30,652		
MAX HYD GPM	50 GPM	50 21	3,500 22,292	50 14	3,500 33,439		
MAX HYD PSI	3,000 PSI						

TORQ-HUB INFORMATION ON PAGE 16