



LABOUNTY

www.stanleyinfrastructure.com/brands/labounty

NEXT GENERATION

LESS MAINTENANCE

MORE PRODUCTIVITY

MSD LEGEND

MOBILE SCRAP SHEARS

A NEW LEGEND - FORGED IN INNOVATION

The goal was simple - minimize maintenance and increase productivity.
The result - maximized productivity and uptime.


We are proud to introduce the Legend Series Mobile shear featuring
Dual Max™ piercing tip, the industry's only full-protection, indexable mobile shear tip.

MSD LEGEND SERIES MOBILE SCRAP SHEARS



FEATURES & BENEFITS

LaBounty shears have proven themselves in scrap metal processing, bridge deconstruction, and industrial demolition for decades.

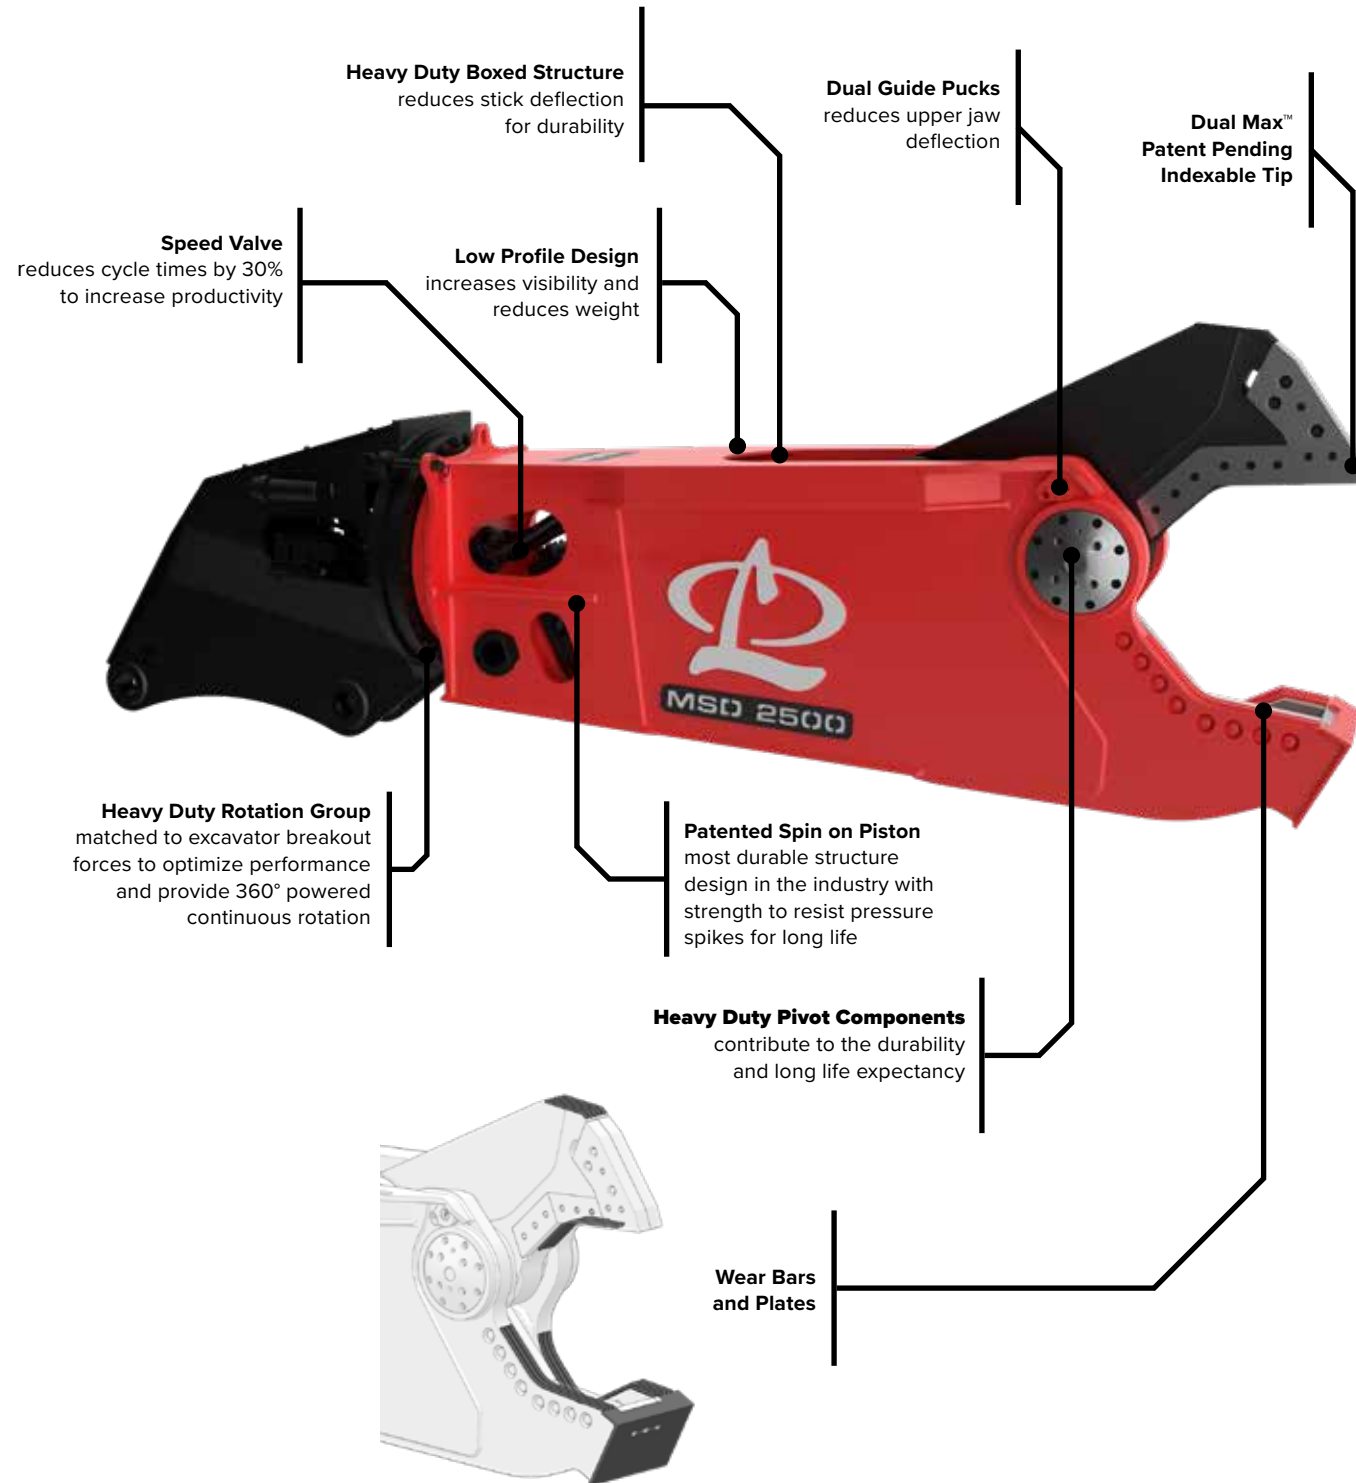


3YR WARRANTY - YOU'RE PROTECTED WITH INSITE



Every shear ordered with InSite will come with a 3-year warranty. InSite pulls information from LaBounty shears to provide performance metrics that help increase productivity and reduce downtime.

ENHANCEMENTS



DUAL MAX™ INDEXABLE PROTECTION

The industry's only full-protection, indexable, piercing tip



10% MORE FORCE

The new MSD Legend has enhanced jaw geometry resulting in 10% more cutting force at the apex compared to prior model



INSITE™ EQUIPPED

InSite™ pulls information from LaBounty shears to provide performance metrics that help increase productivity and reduce downtime

SPECIFICATIONS

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 2nd Member***		Max Excavator Weight - 2nd Member***		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft.	m	lbs	mTons	lbs	mTons	lbs	mTons	lbs	mTons
MSD 1500	7,000	3,200	21	540	25	640	6.8	2.1	26,000	12	42,000	19	55,000	25	70,000	32
MSD 1500R	7,440	3,400	21	540	25	640	10.0	3.1	40,000	18	48,000	22	66,000	30	88,000	40
MSD 2000	9,000	4,100	28	710	29	740	8.0	2.4	42,000	19	44,000	20	70,000	32	99,000	45
MSD 2000R	11,000	5,000	28	710	29	740	10.8	3.3	48,000	22	53,000	24	88,000	40	99,000	45
MSD 2250	10,600	4,800	30	760	30	760	8.6	2.6	44,000	20	51,000	23	88,000	40	110,000	50
MSD 2250R	12,700	5,800	30	760	30	760	11.7	3.6	53,000	24	66,000	30	99,000	45	110,000	50
MSD 2500	11,900	5,400	31	790	33	840	8.7	2.7	51,000	23	66,000	30	88,000	40	154,000	70
MSD 2500R	14,800	6,700	31	790	33	840	12.7	3.9	66,000	30	88,000	40	110,000	50	154,000	70
MSD 3000	14,200	6,400	34	860	37	940	10.0	3.1	66,000	30	77,000	35	143,000	65	176,000	80
MSD 3000R	17,100	7,800	34	860	37	940	13.1	4.0	88,000	40	99,000	45	154,000	70	176,000	80
MSD 4000	17,100	7,800	38	970	43	1090	11.5	3.5	77,000	35	88,000	40	143,000	65	187,000	85
MSD 4000R	19,800	9,000	38	970	43	1090	14.8	4.5	99,000	45	110,000	50	176,000	80	187,000	85
MSD 4500	18,700	8,500	39	990	43	1090	11.0	3.4	88,000	40	132,000	60	165,000	75	CONSULT FACTORY	
MSD 4500R	21,300	9,700	39	990	43	1090	14.3	4.3	110,000	50	165,000	75	187,000	85	CONSULT FACTORY	

InSite available for items highlighted in red

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

PERFORMANCE. PARTNERSHIP. SELECTION.



STANLEY
Infrastructure

6430 SE Lake Rd.
Portland, OR 97222
833.723.1843
www.STANLEYinfrastructure.com

